

Simulation Aids in Impeller Redesign

molding, coresetting, pouring and grinding, so its process is more repeatable, accurate and quick, according to Jed Falgren, the company's vice president. For example, automatic coresetting allows Dotson to reduce the amount of flash produced on the track pad castings, making it possible to remove it more rapidly with automatic grinders. Dotson also designed and built a new punch press to trim all eight square holes in the casting at the same time. This further reduced the process time required.

For the connecting linkage, Dotson utilized defect mapping to eliminate soft core areas that previously led to surface imperfections. By casting features to tight tolerances and accurately setting cores with an automatic core setter, the grinding step was eliminated.

"Dotson provided a quality part at a reasonable price in a reasonable amount of time," Nistler said.

According to Falgren, Dotson also was able to provide Grouser its cast track pads and connecting linkage according to demand, reducing large inventories on hand.

"They can order what they want and have the right inventory to meet their customers' demands. Our short leadtime, coupled with superior on-time performance gives our customers the ability to react quickly and confidently to market fluctuations," Falgren said.

METAL



J Walter Miller Co., Lancaster, Pa., produces brass and bronze castings for the fire protection, pumping and valve industries. When the company converted from manual green sand molding to fully automated molding, many of the casting jobs required design changes.

Impellers represent a particular challenge because of the wide variation between the heavy and thin sections. The metalcaster was experiencing problems in the early transition from manual to automatic molding patterns, and the process was becoming costly.

"This part was becoming a serious problem," said Dan Rudolph, quality engineer for J. Walter Miller. "We had spent about eight weeks and \$5,000

trying to fix the problem and did not seem to be making progress."

The metalcasting facility turned to the QuikCast software from ESI Group, Bloomfield Hills, Mich., to perform solidification modeling.

One particular impeller was produced in a squeezer mold using an open riser fed by a large overhead mass of molten metal. This configuration was not possible with the automatic molding machine, which uses fixed riser or sprue locations with a maximum contact diameter of 1 in. The open riser was replaced by a 1-in. sprue, reducing the contact area. When the new configuration was tried on the automatic machine, the impeller castings exhibited voids in the hub caused by the contraction

MEEHANITE

World-Class Foundries Serving All Industries

If you are looking for high quality castings, reliable service and extra value for your money, partner with a Meehanite foundry. You'll be working with knowledgeable, experienced casting engineers who can help you achieve the right solutions no matter how complex the castings, large or small, or how demanding the service conditions.

26 Different Meehanite Metals

Meehanite specifications cover a whole range of cast irons from easily machinable grades to high strength ductile irons. Select the type of Meehanite best suited to your application on the basis of metallurgical structure and physical property values.

- **General Engineering Applications**
Flake Graphite and Nodular Types
- **Heavy-Duty Applications**
Austempered Ductile Irons
- **Wear-Resisting Applications**
- **Heat-Resisting Applications**
- **Corrosion-Resisting Applications**



Find out what a Meehanite Foundry can do for you.

Visit www.meehanitemetal.com • Call 1-800-356-2141

CASTING INNOVATIONS

of metal. These voids were discovered when the parts were machined.

Prior to the use of QuikCast soft-

ware, the metalcasters added a core in the hub to reduce the amount of liquid metal required to feed it dur-



Prior to the use of Quikcast simulation, J. Walter Miller Co. used a closed riser and cored hub design, which produced a shrink pocket in the wear ring.

ing solidification. The open riser was replaced by a tall closed riser. After casting and boring, the hub of the impeller exhibited no defects, but a new shrink defect began to appear in the wear ring section, a heavy circular rib about an inch from the hub.

“By viewing the [QuikCast] simulation results, I was able to determine that the new shrink defect resulted because the hub section was now solidifying much more quickly,” Rudolph said.

J. Walter Miller applied design changes to the CAD model of the casting that included removing the core in the hub to allow a feed path to the wear ring. Subsequent simulation showed the new design eliminated the shrink in the wear ring while the shrink porosity in the hub was confined to the center-most region that was removed during the machining process.

“This problem would have taken about 12 weeks and \$6,000 in pattern changes plus countless hours of machine time to solve using conventional trial and error methods,” Rudolph said. “With casting simulation, we can easily solve similar problems in two weeks and produce a good pattern the first time.”

METAL

Dedicated to Steel Castings

Since 1934, Pacific Steel Casting has focused exclusively on steel castings. Our decades of dedication to schedules, solutions and customer satisfaction result in great castings from 1 to 7,000 pounds. You'll benefit from our experience during every step from prototype to production, ensuring short lead times and quick turnaround.



Engineering Services:

- Pro-Engineering Conversion of Fabrication
- MAGMA Simulation of Solid Models
- Rapid Prototypes
- Finite Element Analysis (FEA)

Production:


- Shell Mold
- Green Sand
- No-Bake
- Carbon, Low-Alloy
- Machining
- Assembly

To learn more about how we can assist you, visit www.pacificsteel.com.
Or call 510.525.9200 for our catalog or facility video.



PACIFIC STEEL CASTING COMPANY

1333 Second Street • Berkeley, CA 94710

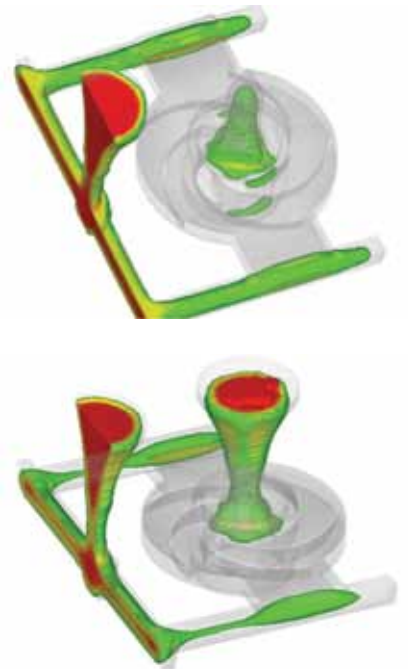

Using solidification simulation, the metal-caster determined that a design incorporating a solid hub and open riser would eliminate the shrink pocket in the wear ring.